

AQT6236TR COL (HS)

Without Seat


CUSTOMER:			One Signature Required	
JOB NAME: PO #: QUOTE #	PLUMBING CC			
DATE: QUANTITY: L R	G	//		
SHIP TO:		//		
		// DATE		
To complete your order, this document must be signed quotes@americanbathgro			r.	
STANDARD FEATURES	Int. Dim.	60 W x 34 D x 88 ¾ H		
- Pre-leveled base	Ext. Dim.	66 W x 36 % D x 91 H		
 AcrylXTM applied acrylic surface 	Skirt Ht.	1/2 skirt, 1/2 COL exterior threshold		
- ½" skirt	Packaged Wt.			
- 1/2" COL exterior threshold	Material	AcrylX™ applied acrylic		
 Compliant when properly installed 	Warranty	30-year warranty*		
- Center front drain outlet	,	* See terms and conditions for details	inches	
- Integral front trench drain	ODTIONIAL			
- 5-year limited warranty	OPTIONAL ACCESSORIES (available for all models)			
- 12" x 24" subway tile	☐ Stainless steel vertical bar 24" x 1½" (entry wall)			
 Slip resistant, textured bottom [ASTM F-462] 	☐ LH ☐ RH ☐ Both			
		p dish (12½ W \times 3½ D \times 11½H),		
CONTRICT ID ATION I III I I I I I I I I I I I I I I I		p dish (7 W x 3½ D x 11½H), shi _l	oped loose	
CONFIGURATION (handed by fixture wall)		d, shipped loose		
☐ Shell reinforced for future accessory installation	☐ Shower cu	urtain, shipped loose		
Fixture wall 🔲 LH 🔲 RH 🔲 Back wall	□ Brass drain	n		
☐ Optional vertical bar reinforcement (entry wall)	Colors:			
☐ LH ☐ RH ☐ Both	Standard			
☐ Fully configured — ADA	Upgraded	☐ Biscuit ☐ Bone		
Fixture Wall (must choose one) LH RH Back Wall		contact customer service for custom	color options)	
Includes two stainless steel 24" x $1\frac{1}{2}$ " grab bars located on the	☐ Additional		00101 op1101101	
side wall and one stainless steel 48" x 1½" grab bar located on		accessories.		
the back wall, per ADA guidelines. (std config)				
☐ Factory-installed plumbing options per ADA requirements				
☐ Hand-held shower assembly, 30" slide bar and 60" hose			?	
☐ Pressure balancing mixing valve	ĨÝ.			
☐ Flessure balancing mixing valve			ļ	
	41/			
CUSTOM OPTIONS (not available if ADA configuration is selected)				
Grab bars:			_	
☐ Horizontal U-shaped bars: 24" (side walls), 48" (back wall)			,	
☐ Vertical bar 24" (entry wall) ☐ LH ☐ RH ☐ Both				
Grab Bar finish:		50111		
Stainless steel (1½" dia.)				
Powder-coated white (11/4" dia.)				
☐ Factory-installed plumbing options per ADA requirements	[
☐ Hand-held shower assembly, 30" slide bar and 60" hose	/			
☐ Pressure balancing mixing valve	<u> </u>			
Fixture wall LH RH Back wall	65	~ 		
	∥/			
Grate: ☐ Stainless steel		$M \parallel M \parallel M$		
	$\parallel ec ec ec ec ec ec ec ec ec ec$	´ , 		
☐ White				
☐ Tamper-proof				



by Aquarius

Without Seat

ADA/ANSI compliant when fully equipped and installed according to guidelines.

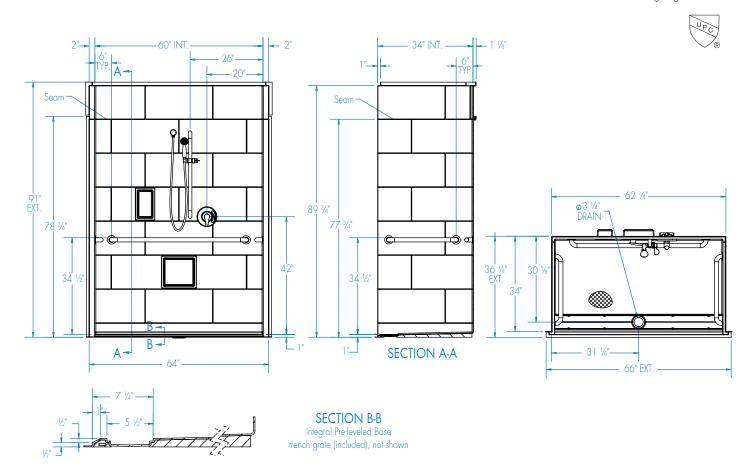

FEATURES Ibs Dimensional Tolerance ± %". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower AQT6236TR COL (HS)	AcrylX™ applied acrylic	Smooth tile	4	Center Front	$\frac{1}{2}$ " skirt $\frac{1}{2}$ " exterior COL threshold	200	210

DIMENSIONS

Carathantana	:
Specifications	inches (mm)
Width: Ext. / Int.	66 / 60
Depth: Ext. / Int.	36 1/8 / 34
Height: Ext. / Int.	91 / 88 ¾
Enclosure Opening:	60
Skirt Height:	1/2
Drain Rough-In (from Back Wall)	30 %
Drain Rough-In (from Side Wall)	31 1/8

FRAMING DIMENSIONS inches (mm)

Туре	D Depth	W Width	H Height	Α	В	С
Alcove	34	62 1/4	-	Box Out	31 1/8	30 %





High Style Attachment

