



PERCY®

SINGLE LEVER AND VESSEL FAUCETS



- Cast brass spout and body
- Distinct, geometric handle design
- 3/8" compression braided, stainless steel flexible supply hose
- Speed Connect® with 1-1/4" drain
- Lead Free—faucet contains ≤0.25% total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/
CSA B125.1/NSF 61/Section 9

EPA WaterSense® High Efficiency
Lavatory Faucet Specification

Certified Compliant with 0.25% Weighted
Average Lead Content Regulations

AVAILABLE FINISHES

Polished Chrome
Brushed Nickel

FINISH CODE

100
144



DESCRIPTION

1.5 gpm (5.7 L/min)
Single Lever Faucet

- Loop Handle
- Stem Handle (ADA only)

Vessel Faucet

- Loop Handle
- Stem Handle (ADA only)

1.2 gpm (4.5 L/min)
Single Lever Faucet

- Loop Handle
- Stem Handle (ADA only)

Vessel Faucet

- Loop Handle
- Stem Handle (ADA only)

PRODUCT NUMBER

D35105104.XXX

D35105100.XXX

D35105154.XXX


D35105150.XXX

D3510512C.XXX

D3510510C.XXX

D3510517C.XXX

D3510515C.XXX



ROUGH-IN DIAGRAM
SHOWN ON NEXT PAGE




Meets the Americans with Disabilities Act
Guidelines and ANSI A117.1 Requirements
for the physically challenged.



PERCY[®]

SINGLE LEVER AND VESSEL FAUCETS

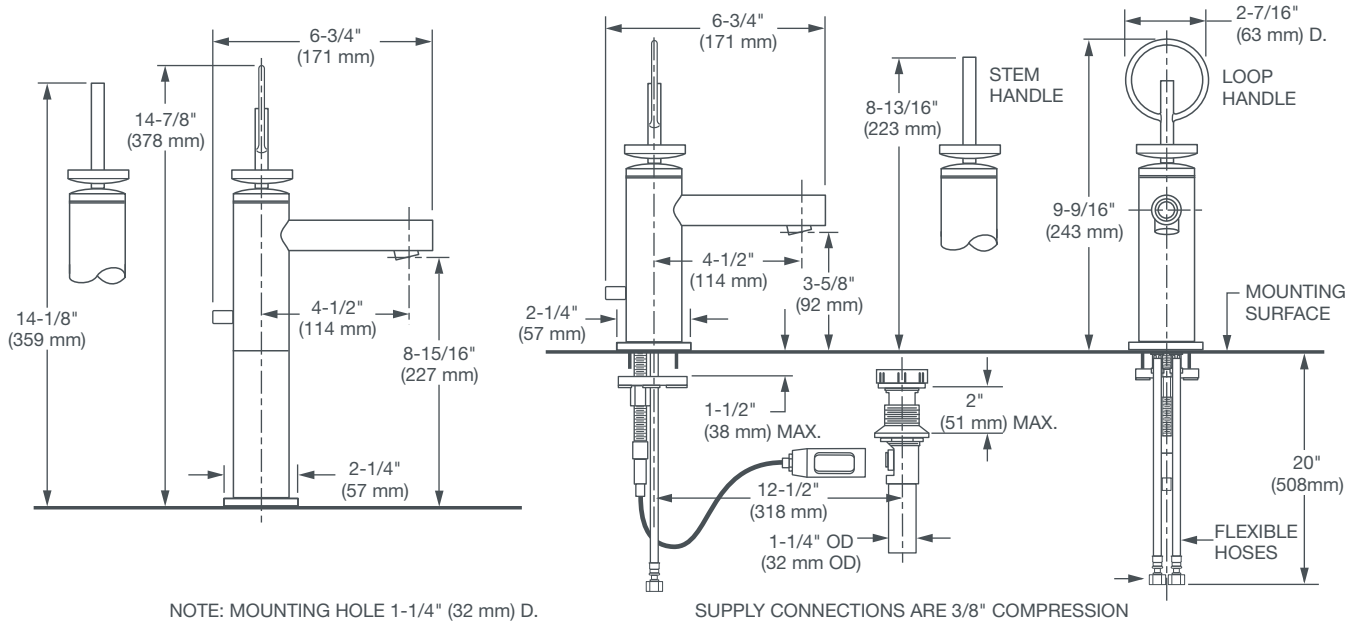

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**