

Carson Wall

KWL1081, KWL1091, KWL1101, KWL1111 | I.1

GENERATION LIGHTING WALL

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes. **(2" x 4" J-box Only.)**

This product is safety listed for damp locations.

This product may be dimmed with an electronic dimmer.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

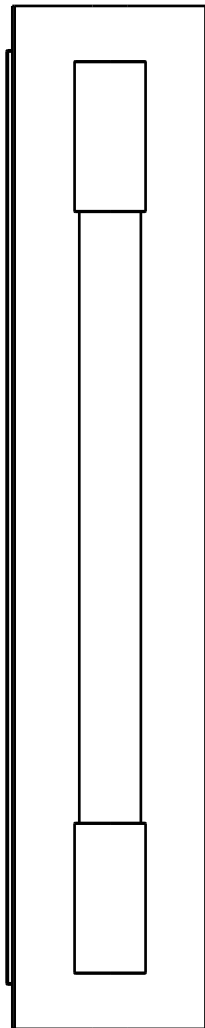

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

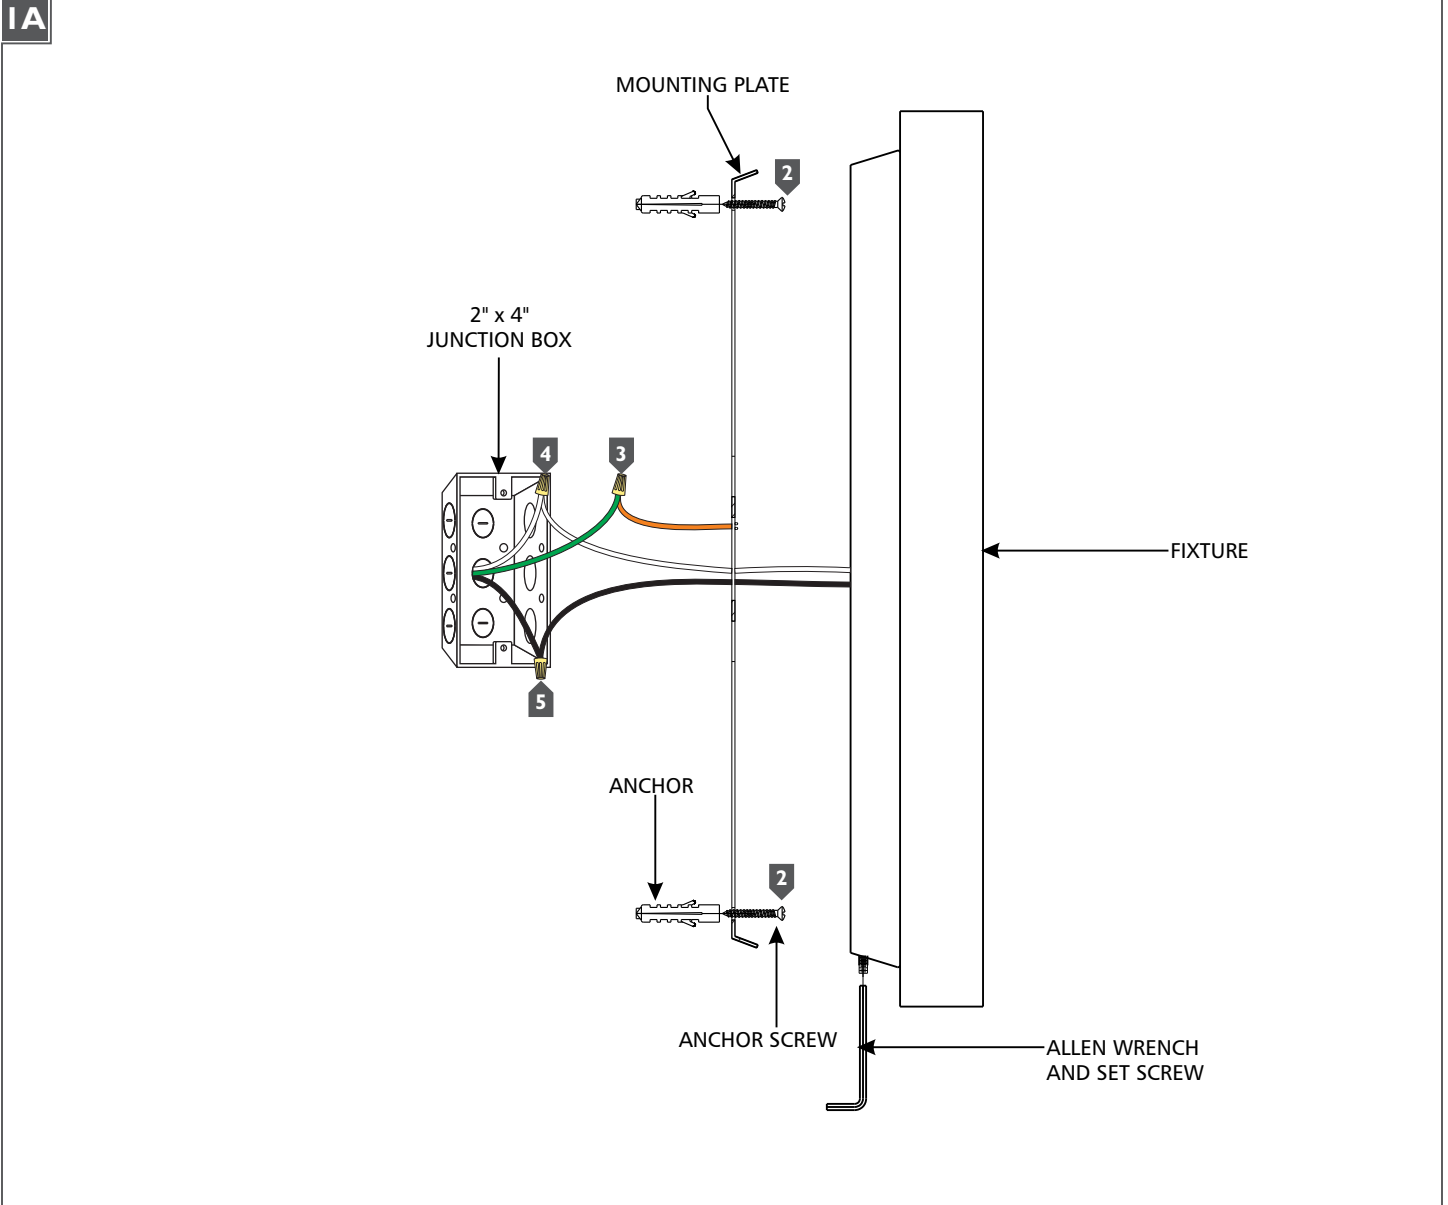

- 1 Separate the mounting plate from the fixture by loosening (do not remove) the set screw with the provided Allen wrench.
- 2 Secure the mounting plate to the 2" x 4" junction box and the wall with the provided anchor screws and hardware.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Neatly place all the wires into the junction box, install the fixture onto the mounting plate from the top first then rotating it down and secure it in place tightening the set screw with the provided Allen wrench.